


HED pumps

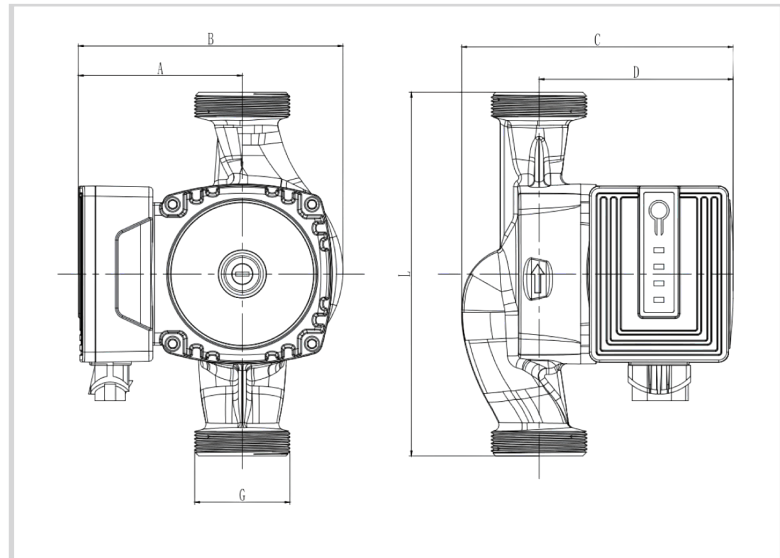

Material	
Hydraulic casing	cast iron cataphoresis
Impeller	PES/PP
Shaft	ceramic
Bearings	graphite
Rotor can	stainless steel

Technical specification	
Q	3 - 6.1 m ³ /h
H	4 - 12 m
P	PN 10 bar
DN	25/32
Pipe connection	130/180 mm
Installation	threaded
Insulation class	Class F
Degree of protection	IP 44
Voltage	1 - 230V

Model	Dimension(mm)					
	A	B	C	D	L	G
HED 25/X-130	81	131	142	106	130	G1.5
HED 25/X-180	81	131	135	96	180	G1.5
HED 32/X-180	81	131	135	96	180	G2

Model	Power	Max. Flow	Max. Head	Volute Length	Inlet/Outlet	Thread
	W	m ³ /h	m	mm	mm	inch
HED 25/4	5~22	3	4	130/180	25	G1.5
HED 32/4	5~22	3	4	180	32	G2
HED 25/5	5~32	3.4	5	130/180	25	G1.5
HED 32/5	5~32	3.4	5	180	32	G2
HED 25/6	5~45	3.7	6	130/180	25	G1.5
HED 32/6	5~45	3.7	6	180	32	G2
HED 25/7	5~52	4	7	130/180	25	G1.5
HED 32/7	5~52	4	7	180	32	G2
HED 25/8	12~63	5.2	8	130/180	25	G1.5
HED 32/8	12~63	5.2	8	180	32	G2
HED 25/9	12~90	5.4	9	130/180	25	G1.5
HED 32/9	12~90	5.4	9	180	32	G2
HED 25/10	12~100	5.7	10	130/180	25	G1.5
HED32/10	12~100	5.7	10	180	32	G2
HED 25/12	12~120	6.1	12	130/180	25	G1.5
HED 32/12	12~120	6.1	12	180	32	G2

Peformance range

