


SC pumps




Material	
Hydraulic casing	cast iron cataphoresis
Impeller	PES/PP
Shaft	ceramic
Bearings	graphite
Rotor can	stainless steel

Technical specification	
Q	2.3 - 9.6 m ³ /h
H	4 - 15 m
P	PN 10 bar
DN	15/25/32
Pipe connection	130/180 mm
Installation	threaded
Insulation class	Class F
Degree of protection	IP 44
Voltage	1 - 230V

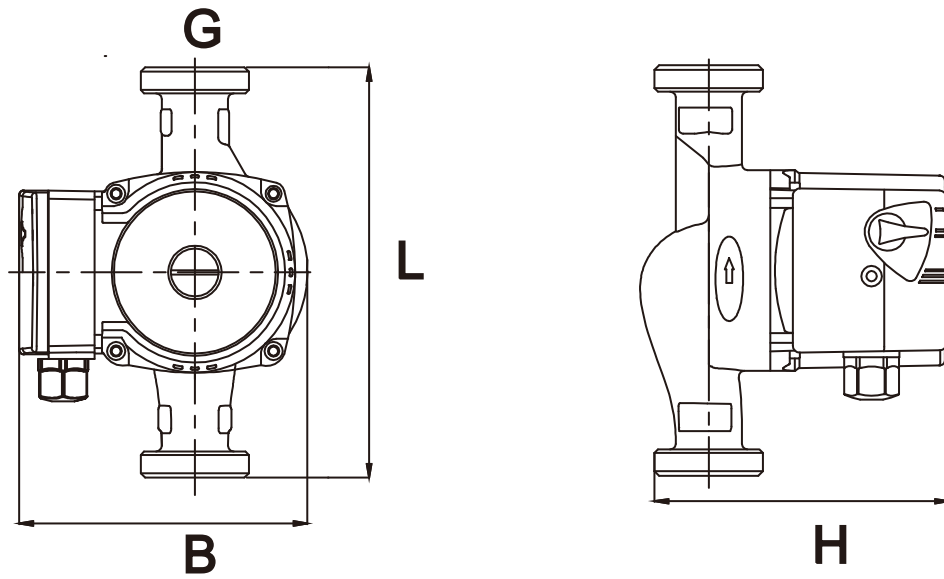


Model	Power	Max.Flow	Max.Head	Voltage	Material of Rear Housing				Dimension(mm)					Weight (Kg)
	(W)	(m³/h)	(m)	(V)	Cast Iron	Plastic	Brass	Stainless steel	L		B	H	G	
									130	180				
SC15/4	72	2.3	4	230V~50Hz	●		●	●	●		127	133	1"	2.2
SC25/4		2.9			●		●	●	127	133	1 1/2"	2.4		
SC32/4		3.4			●		●		●	127	133	2"	2.6	
SC15/6	93	2.6	●			●	●	●		127	133	1"	2.3	
SC25/6		3.3	●				●	●	127	133	1 1/2"	2.5		
SC32/6		3.9	●			●		●	127	133	2"	2.7		
SC15/7	135	3.3	7		●				●		123	145	1"	2.6
SC25/7		3.8			●			●	●	123	145	1 1/2"	3.0	
SC32/7		4.2			●				●	123	145	2"	3.2	
SC15/8	165	3.4	8		●					●	127	159	1"	3.3
SC25/8	182	6.9			●		●		●	134.5	158	1 1/2"	4.2	
SC32/8	270	9.6			●		●		●	137	172	2"	4.8	
SC20/12	245	3.1	12		●		●			●	150	152	1"	4.4
SC25/12	245	3.7			●				●	150	160	1 1/2"	4.5	
SC25/15	270	4.1	14		●		●			●	149	160	1 1/2"	5.3


SC 15/4

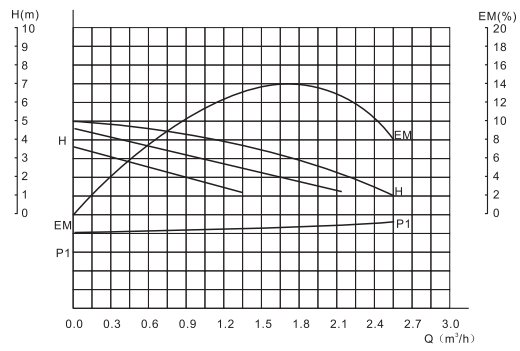


SC 25/4

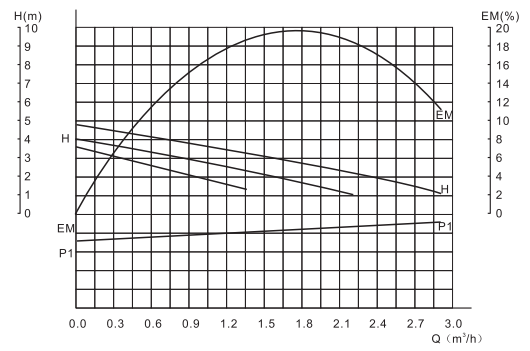


SC 32/4

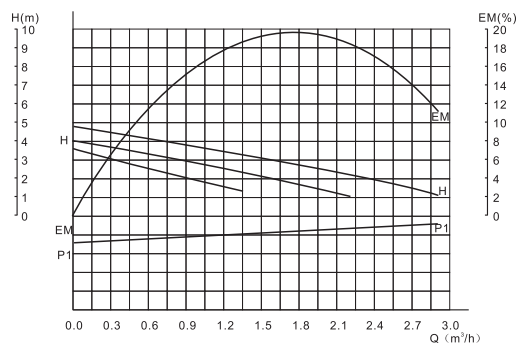


SC 15/6

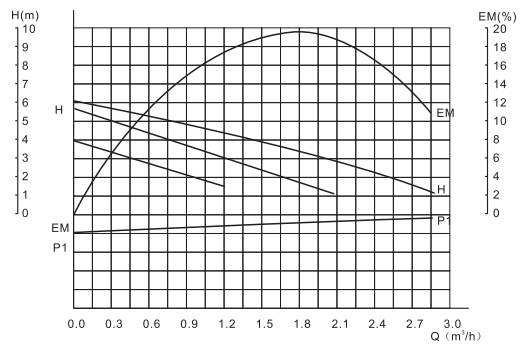


SC 25/6

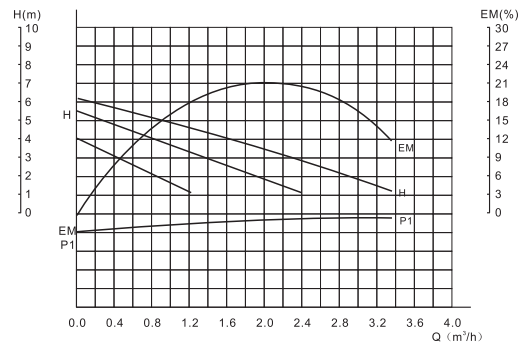


SC 32/6

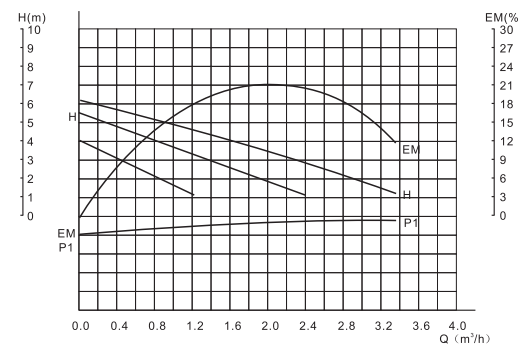


SC 15/7

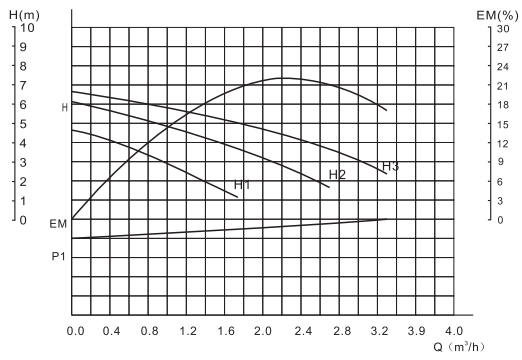


SC 25/7

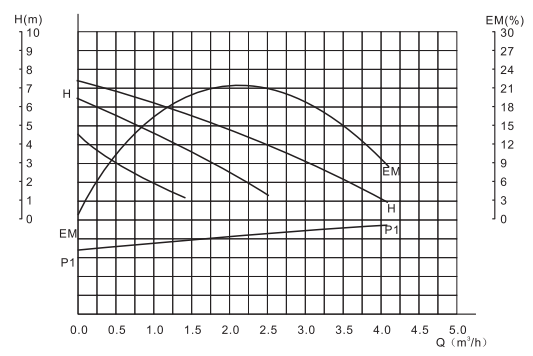


SC 32/7

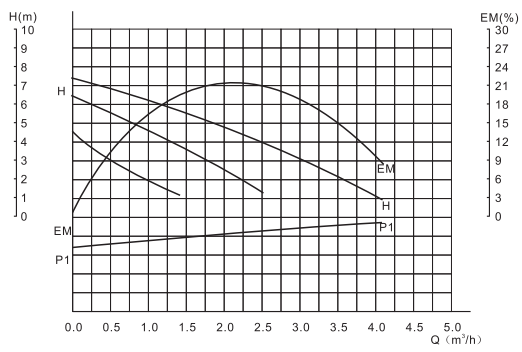


SC 25/8

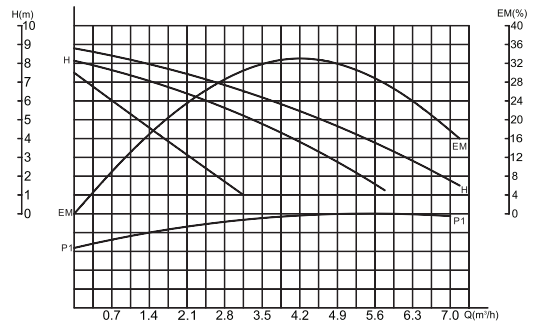


SC 32/8

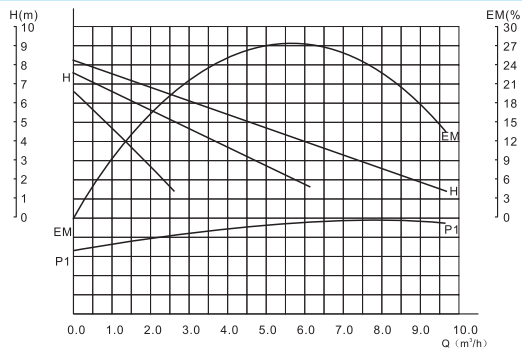

SC 20/12

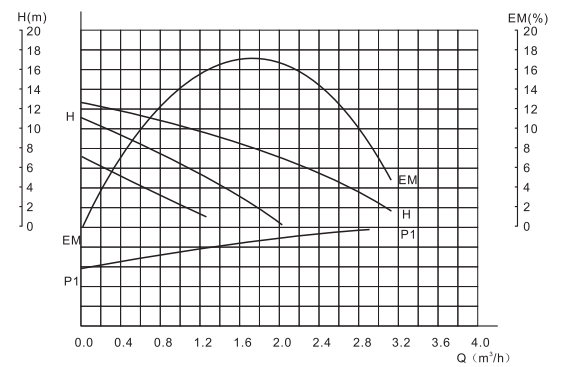

SC 25/12

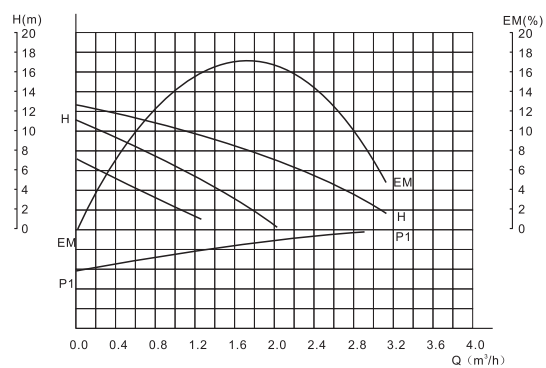

SC 25/15

